

Design technology Higher level Paper 2

Thursday 14 May 2015 (afternoon)

Candidate session number									

1 hour 45 minutes

Instructions to candidates

- · Write your session number in the boxes above.
- Do not open this examination paper until instructed to do so.
- Section A: answer all questions.
- Section B: answer one question.
- Write your answers in the boxes provided.
- A calculator is required for this paper.
- The maximum mark for this examination paper is [60 marks].

245004



Section A

Answer **all** questions. Write your answers in the boxes provided.

1. Figure 1 shows the BBOXX plug and play solar system which links a solar panel to a battery pack into which people can plug accessories such as phone chargers, portable lights etc. The system was developed by three engineering students, Christopher Baker-Brian, Mansoor Hamayun and Laurent Van Houcke, while at university. With other students they founded a charity to develop and distribute solar-powered battery packs to locations with no national electricity grid available. After graduation the students formed a business selling the products to local companies in different countries. The local company purchases the system from BBOXX and obtains support from selling them and providing an after-sales service. Using local companies who know the market in their area rather than their own staff allowed a quick expansion for BBOXX into 14 countries by 2013. The systems are manufactured in China and typically cost £13 per month to run from the national grid compared to £10 per month for a petrol-based generator. Table 1 shows data relating to the BBOXX battery and control unit. Table 2 shows data relating to the solar panel.

Figure 1: BBOXX plug & play solar system



Table 1: Battery & control unit data

Battery:

- 12V DC sealed head
- 84 Wh of stored energy
- Charged via the national grid or solar panel

Control Unit:

- Continuous 60 W DC output power
- Removable fuse
- Thermal overload and short circuit protection
- Battery state of change display
- 2 USB outputs
- 4 12 V DC outputs
- 95% charging efficiency
- 20 °C 25 °C recommended operation temperature range
- 184 mm × 80 mm × 260 mm dimensions
- 3.68 kg weight
- 60 cm drop test conducted
- 25 °C recommended storage temperature
- 18 months warranty (guarantee)

[Source: BBOXX Ltd. Used with permission]



(a)	(i)	State one reason why consumers may purchase a BBOXX system rather than a petrol-powered system.	[1]
	(ii)	State the data from Table 1 most likely to be affected by long-term use of the control unit.	[1]
	(iii)	Describe why the drop test for the control unit is from a 60 cm height.	[2]
(b)	(i)	Outline one advantage to the consumer of the 18 months warranty (guarantee).	[2]



Turn over

	(ii)	Outline a design feature which takes into account the possible exposure of the control unit to high temperatures.	[2]
(c)	(i)	State one disadvantage of charging the battery from the national grid rather than from the solar panel.	[1]
	(ii)	Suggest one reason why the BBOXX system may be considered an appropriate technology.	[3]



Table 2: Data for the solar panel

- 15 W flexible polycrystalline panel
- 10 m of cable
- -40 °C to 85 °C operating temperature
- 60 m/s wind bearing
- Hail impact rate determined by 227 g steel ball dropped from 1 m height equivalent to a 25 mm hail stone at 97 km/h

[Source: BBOXX Ltd. Used with permission]

(d)	(i)	State the type of evaluation strategy that relates to the hail impact test.	[1]
	(ii)	Discuss one potential limitation of the hail impact test in relation to anticipated conditions of use for the solar panel.	[3



Turn over

(i)	Outline why it would be possible to use the solar panel in more global locations than the control unit.	
(ii)	Outline why the solar panel is designed to be flexible.	
(ii)	Outline why the solar panel is designed to be flexible.	
(ii)	Outline why the solar panel is designed to be flexible.	
(ii)	Outline why the solar panel is designed to be flexible.	_



(a)	State one reason why coal is a relatively cheap fuel source for many industrialized countries.	
(b)	Discuss whether clean coal technology eliminates the environmental impact of the use of coal as a major fuel source in industry.	
(a)	Describe how the structure of LVL timber makes it a suitable choice of material for roof beams spanning a roof 25 m long.	
(a)	roof beams spanning a roof 25 m long.	
(a)		
(a)	roof beams spanning a roof 25 m long.	
(a)	roof beams spanning a roof 25 m long.	
(a)	roof beams spanning a roof 25 m long.	
(a)	roof beams spanning a roof 25 m long.	
	roof beams spanning a roof 25 m long. Describe why LVL beams are often made to resemble beams made from solid	
	roof beams spanning a roof 25 m long. Describe why LVL beams are often made to resemble beams made from solid	
	roof beams spanning a roof 25 m long. Describe why LVL beams are often made to resemble beams made from solid	




Turn over

[1]

4. (a) **Figure 2** shows a 7-member structure with tensile (t) and compressive (c) forces identified.

Figure 2: 7-member structure

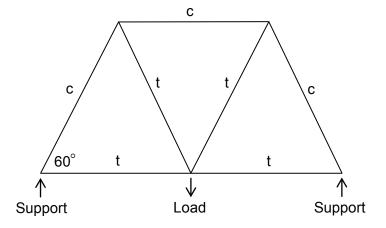

State the type of load created by the mass of the structure in **Figure 2**.

[Source: © International Baccalaureate Organization 2015]

Ξχμ	plain why the structure in Figure 2 is in equilibrium.



5. (a) **Figure 3** shows an electric belt sander machine used in workshops to abrade timber.





[Source: "Bandslijpmachine hobbykwaliteit (Westfalia)" by Pudding4brains – Own work. Licensed under Public Domain via Wikimedia Commons – https://commons.wikimedia.org/wiki/File:Bandslijpmachine_hobbykwaliteit_(Westfalia).jpg#/media/File:Bandslijpmachine_hobbykwaliteit_(Westfalia).jpg]

Outline one way in which it is easy for users to overload the machine shown in

igure 3	when usir	ng it to abi	rade a pied	e or umber.			
escribe	why belt s	sander ma	achines ma	y be conside	ered low mai	ntenance.	
escribe	why belt s	sander ma	achines ma	y be conside	ered low mai	ntenance.	 -
escribe	why belt s	sander ma	achines ma	y be conside	ered low mai	ntenance.	
escribe	why belt s	sander ma	achines ma	y be conside	ered low mai	ntenance.	
escribe	why belt s	sander ma	achines ma	y be conside	ered low mai	ntenance.	



Turn over

6.	(a)	State one key feature of a living building in relation to water usage.	[1]
	(b)	Discuss why the symbolic terms of "grey water" and "black water" are often used in relation to conservation of resources.	[3]



Please do not write on this page.

Answers written on this page will not be marked.



Turn over

Section B

Answer **one** question. Write your answers in the boxes provided.

7. **Figure 4** shows a wooden (bamboo) wireless keyboard and mouse. The wooden bamboo timber is grown in tropical conditions from a sustainable resource. The keyboard and mouse both have a water and stain resistant gloss finish and are powered by two small batteries. **Figure 5** shows a close up of the keys on the keyboard.

Figure 4: Wooden keyboard and mouse



(a)

Figure 5: Keyboard close-up



 Γ

[Source: www.safield.co.uk. Used with permission]

	[4.
Describe how the design of the bamboo keyboard is seen as a combination of radical and incremental design.	[2]



(b)	(i)	Outline which category of Design for Manufacture (DfM) was a dominating constraint on the design brief for the keyboard and mouse.	[2]
	(ii)	Evaluate the bamboo keyboard in relation to ease of maintenance.	[3]
(c)	(i)	Outline what is meant by "the bamboo timber coming from a sustainable resource".	[2]



Turn over

(ii)	Discuss three potential target markets for the bamboo keyboard and mouse.	[9]



Please do not write on this page.

Answers written on this page will not be marked.



Turn over

8. Figure 6 shows the S-shaped plastic red chair designed in 1967 by Vernon Panton and manufactured by Vitra. It is made from a single sheet of rigid polyurethane foam and copies of the original chair are now available in a selection of colours. In 1967 the chair was viewed as a radical design based on the use of new materials and manufacturing techniques.

Figure 6: Panton S-shaped chair

[Source: © Vitra. Used with permission]

Describe how plastic deformation contributes to the manufacture of the chair

	in Figure 6.
_	
	Describe how elastic deformation contributes to the performance of the chair in Figure 6 .

(This question continues on the following page)

(a)

(i)



(b)	(i)	Outline one reason why the chair in Figure 6 was expensive to purchase in 1968 even though it is a simple structure made from a single sheet of plastic.	[2]
	(ii)	Discuss the surface finish of the chair in Figure 6 in relation to comfort.	[3]
(c)	(i)	Outline the manufacturing technique for the chair in Figure 6 .	[2]



Turn over

(ii)	Discuss three ways in which the designer of the chair in Figure 6 has attempted to balance form with function.	[9]



Please do not write on this page.

Answers written on this page will not be marked.



Turn over

9. Figures 7a and 7b show the Bladefish BF 3000 diving aid. It is designed for relatively inexperienced divers as the maximum depth of use is 30 m and the maximum speed is 4.25 km/h. The Bladefish can be used for 40 minutes before recharging which takes an hour to charge to 80 % capacity. The Bladefish has a 200 W power rating from an 18 V lithium ion battery. It measures 38 cm × 36 cm × 16 cm and weighs 4.4 kg. Figure 8 shows the Bladefish packed in a standard suitcase.

Figures 7a and 7b: Bladefish diving aid





Figure 8 : Bladefish packed in luggage



[Source: www.bladefish.co.uk]



(a)	(i)	Outline one potential limitation of the use of the Bladefish for observing underwater wildlife.	[2]
	(ii)	Outline one potential limitation of the Bladefish for use on holiday when travelling by air.	[2]
(b)	(i)	Outline one disadvantage of the Bladefish in relation to green design.	[2]



Turn over

(ii)	Discuss the design of the Bladefish in relation to maintenance.	[3]
(i)	Outline one limitation of the Bladefish when used by a family on holiday	[2]
(i)	Outline one limitation of the Bladefish when used by a family on holiday.	[2
1		



(11)	Discuss three potential safety issues for the use of the Bladefish.	[9]



Please **do not** write on this page.

Answers written on this page will not be marked.

